
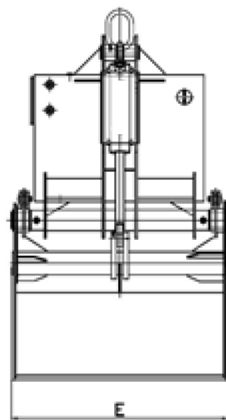
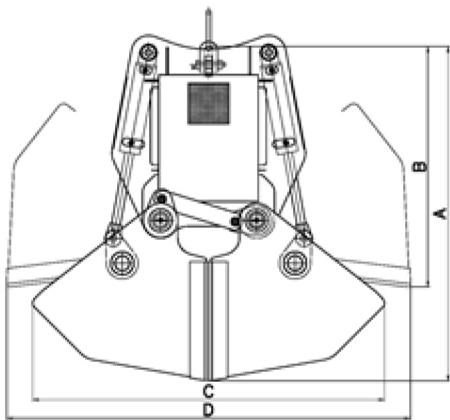


FOR HANDLING PILED AND BULK MATERIAL SPECIALLY FOR HANDLING CEMENT, CLINKER, LIMESTONE.. DENSITY UP TO 1,8 t/m³ (± 15%)

Strive Engineering Solutions OPC Pvt Ltd
Kurali, Mohali, Punjab(IN)
info@striveengineering.com
+91-9464036982

- Clamshell design ideal for all granulometries, angle of inclination and bulk density
- Clamshell lips anti-wear and anti-abrasion (HARDOX 500)
- Optimized geometry, high filling factor
- Design and fabrication acc. standard **FEM 1001/98, A8-M8**
- Optimized geometry, high filling factor
- Reduced height with low c.g., multi-stable, can work at any angle (±90°)
- Robust structure in high elastic strength steel
- Axles of bearings: hardened special material
- Full protected hydraulic cylinders.
- **HIGH PRESSURE PUMP, LOW SOUND LEVEL**
- Maintenance and lubrication free.
- FEA calculation.
- **ISO 9001** quality standard
- CE conformity

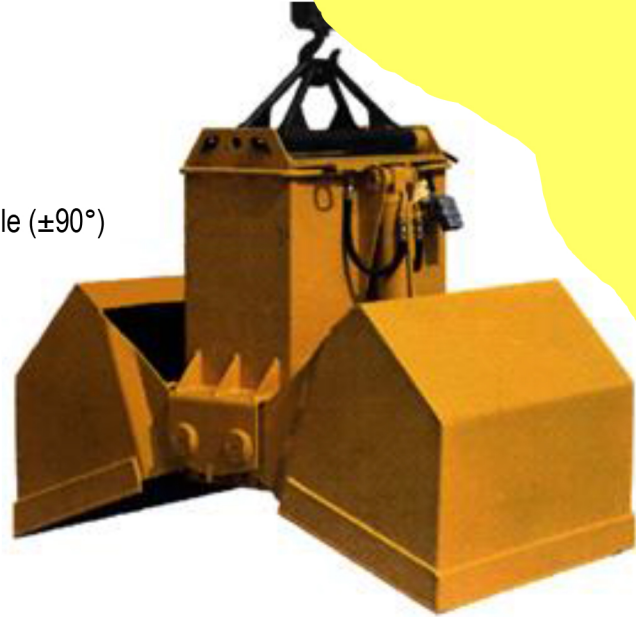

TECHNICAL FEATURES

Size 1	CAPACITY 2		Dead Weight Grab 3	CRANE 4	Motor 5	Intensity 400 V A	Operating Pressure Bars	Closing Time 6 s"	Emptying Time s"	Overall Dimensions mm.				
	Volume	Load Max.								A	B	C	D	E
	M ³	Kg												
EHCB-500	0,5	900	1.050	1,9	7,5	14	225	9,5	4	1596	1210	1558	1799	1088
EHCB-750	0,75	1.350	1.200	2,5	7,5	14	225	9,5	4	1596	1210	1558	1799	1088
EHCB-1000	1	1.800	1.590	3,3	11	22	225	9,5	4	1812	1236	1965	2227	1088
EHCB-1300	1,3	2.340	1.750	4	11	22	225	9,5	4	1812	1236	1965	2227	1174
EHCB-1500	1,5	2.700	2.050	4,7	11	22	225	10,5	3,5	1921	1383	1993	2342	1340
EHCB-1750	1,75	3.150	2.200	5,3	15	30	225	10,5	3,5	1921	1383	1997	2342	1555
EHCB-2000	2	3.600	2.500	6,1	15	30	225	11,5	4,5	2049	1584	1933	2377	1858
EHCB-2500	2,5	4.500	2.900	7,4	15	30	225	11,5	4,5	2418	1795	2436	3016	1616
EHCB-2750	2,75	4.950	3.050	8	22	43	225	9	4	2418	1795	2436	3016	1616
EHCB-3000	3	5.400	3.250	8,6	22	43	225	11,5	4,5	2418	1795	2436	3016	1757
EHCB-3500	3,5	6.300	3.550	9,8	22	43	225	11,5	4,5	2418	1795	2436	3016	2040

THE LOADING TIME IS CONSIDERED WHEN THE SHELLS HAVE CLOSED AT 90-95%
TIME FOR UNLOADING IS CONSIDERED TO BE 50% OF THE TOTAL OPENING TIME. These characteristics are approximate. EDITION 2021